




persiana scudo
sicurezza innovativa

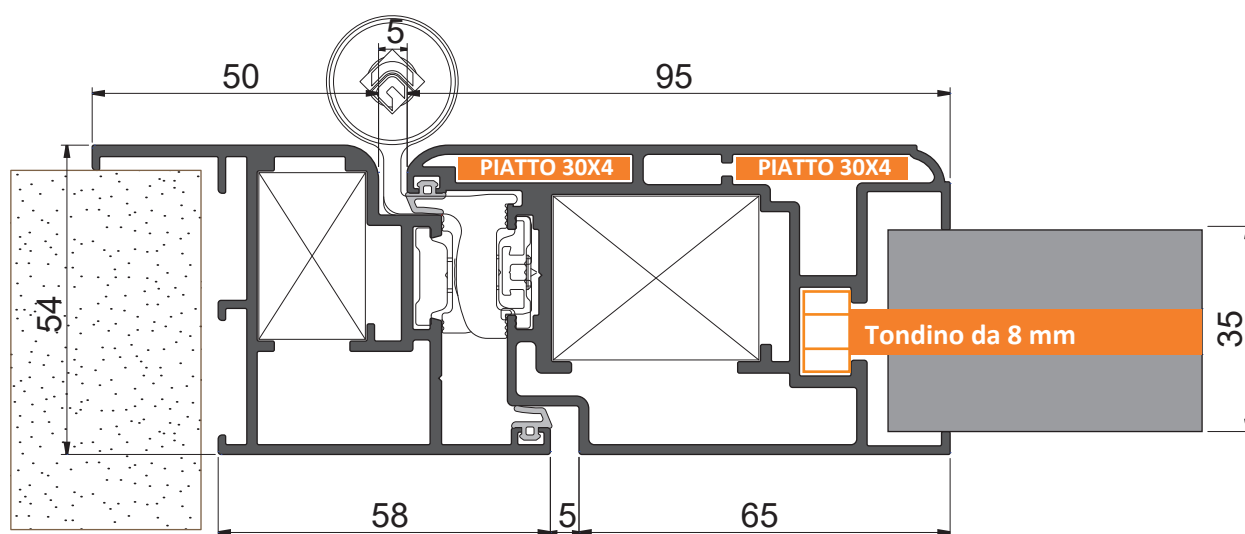

SCHEDA TECNICA DEL SISTEMA

SERIE: PERSIANA SCUDO

PROFILATI estrusi lega: 6060 (UNI 9006/1).

TOLLERANZE DIMENSIONALI E SPESSORI: UNI EN 12020-02.

TIPO DI TENUTA ARIA ACQUA: sormonto/complanare.

DIMENSIONE BASE DEL SISTEMA:

Telaio : sez. 54 mm.

Anta : sez. 54 mm.

Cava persiana : 35 mm.

Fuga sul nodo centrale : 5 mm.

Aletta di battuta a muro : 22 mm.

FATTORE SOLARE: $G_{TOT} < 0,35$

IMPIEGO: il sistema permette la realizzazione di persiane antieffrazione orientabili e fisse con telaio a una o due ante.

SYSTEM TECHNICAL CARD

SERIES: SCUDO SHUTTER

EXTRUDED ALLOY PROFILES: 6060 (UNI 9006/1).

DIMENSIONAL TOLERANCES AND THICKNESSES: UNI EN 12020-02.

AIR-WATER SEAL TYPE: overlap/complanary.

BASIC DIMENSIONS OF THE SYSTEM:

Frame section : sez. 54 mm.

Wing section: sez. 54 mm.

Space for shutter blade : 35 mm.

Space on central section : 5 mm.

Wall flap : 22 mm.

SOLAR FACTOR: $G_{TOT} < 0,35$

USAGE: the system allows the creation of adjustable and fixed burglary shutters with frame to one or two wings.

Resistenza antieffrazione RC3 / RC4